


OEM Heat Control Systems

LMV

Innovative electronic air-fuel ratio control

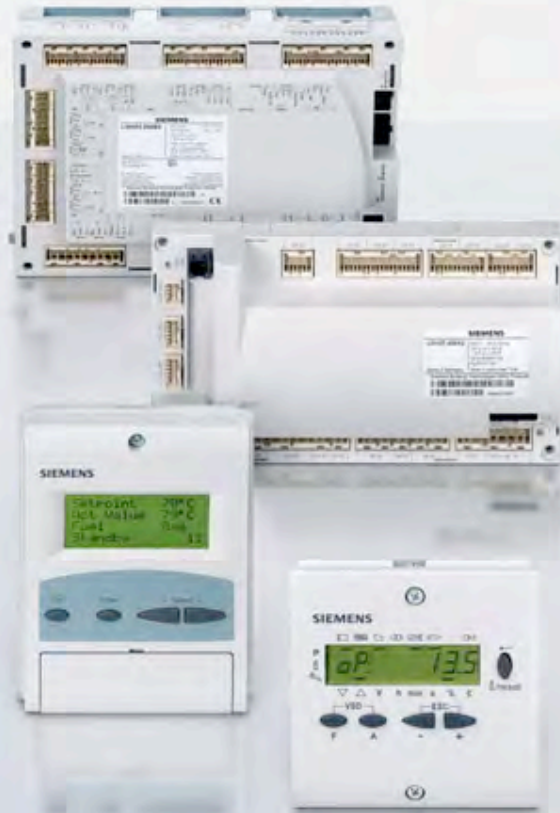

Forbes and
Hunt Boilers

SIEMENS

Answers for infrastructure.



LMV – complete solutions from a single source

Economical operation and environmental protection are important criteria with plant for large building complexes and in industrial process heat generation. With large burner and boiler capacities, efficiency becomes a major cost factor. Also, high emission levels can cause problems to plant operators. Up to now, burners have been equipped with mechanical air-gas ratio control (cam with mechanical linkage between air and gas damper or oil controller).

A complicated mechanical system, poor repetition accuracy and difficult and time-consuming settings were the rule, leading to inadequate efficiency, considerable strain on the environment and a reduced modulation range.

Here, electronic air-fuel ratio control can bring into play a number of benefits: Simpler burner design and greater precision ensure higher efficiency levels while reducing emissions. So, all in all, it's a more economical and more environment-friendly solution.

Safety, efficiency and user friendliness

Future-oriented burner management from Siemens

In addition to products for floor-standing and wall-hung boilers, Siemens develops, produces and supplies components for use with forced draft standard burners and industrial burners.

The comprehensive range of products includes burner controls, actuators, sensors and flame detectors, control systems, valves, test equipment and integrated system solutions.

These products and systems enable us to offer optimum solutions for our customers' market segments. They include single- and multi-family houses (residential buildings), commercial buildings and complex firing systems for industrial processes.

Interplay of a special class

This is the compact LMV burner management system for the control and supervision of single- or dual-fuel forced draft burners of medium or large capacity.

All system components used are matched to the microprocessor-based LMV burner controls.

This approach ensures a perfect combination of all devices, eliminating the need for making nuisance adjustments.

The extensive range of standard components, such as temperature and pressure sensors, boiler controllers, process automation systems and gas valves, round off our product portfolio and give consideration to almost any kind of requirement.


One example are the VGD40 double gas valves for large capacities. They offer very compact, flexible design and optimized flow characteristics.

Safety and security

Siemens also sets new standards in terms of safety and security: The LMV uses 2 powerful microprocessors to ensure parallel handling of all signals via 2 channels. The signals are continuously compared with one another. So we are fully aware of our responsibility as market leader and system provider for burner control equipment.

Highlights

- Broad range of products
- Optimum systems for demand-related solutions
- Global approvals (UL, CSA and CE)

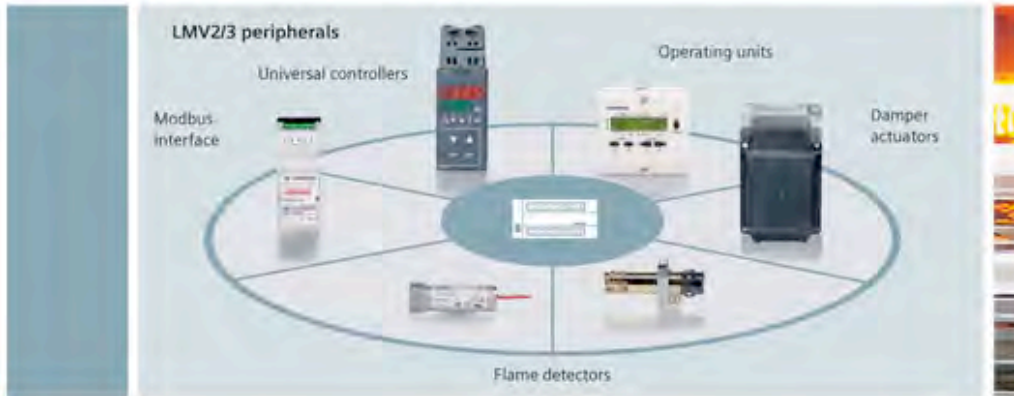

Flexibility in standard applications

Application areas

The LMV2/3 air-fuel ratio control system is used for the control of modulating or multi-stage oil or gas burners of medium capacity.

A simple user and service friendly interface with LCD enables the LMV2/3 to be commissioned quickly and ensures efficient and cost-saving maintenance of the entire system.

The benefits offered by electronic air-fuel ratio control are independent ratio curve settings and flexibility in terms of burner design. Fuel and air actuators can be fitted anywhere without having to give consideration to mechanical linkage.

Optimum conditions


Key components of the LMV2/3 system are the SQM3 and SQN1 actuators. They ensure accurate positioning of the air and fuel dampers, thus warranting optimum combustion with low emission levels. Variable actuator running times provide for quick start up when there is a request for heat, and good control performance in modulating mode.

The burner management system brings its benefits into play not only in operation but also during the development and design phase of new generations of burner: The LMV2/3 has the burner control, electronic ratio control and gas valve proving integrated in its basic unit.

Highlights

- Straightforward commissioning
- Integrated air-fuel ratio control
- One unit for oil- and gas-fired operation
- Integrated gas valve proving


Summary of uses



Summary of key features

	LMV2	LMV3	LMV51	LMV52
Torque of actuators				
Dual-fuel operation				
Integrated load controller				
VSD control				
O ₂ combustion optimization				



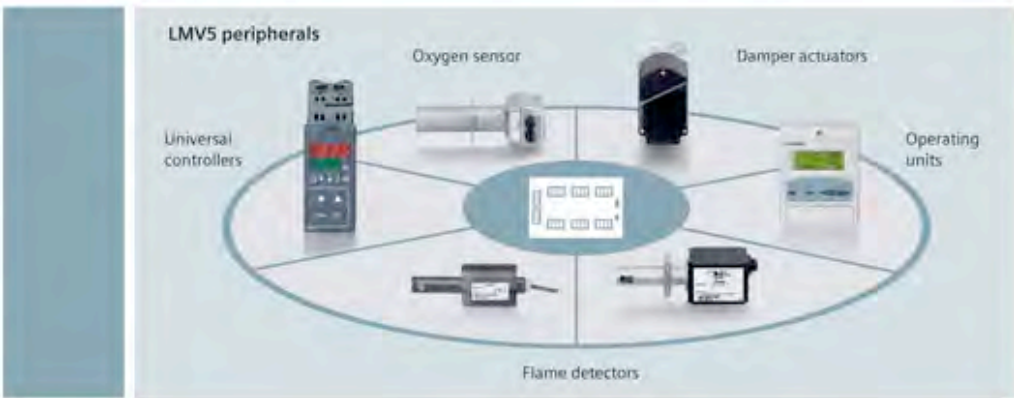

Ease of use and extensive functionality

Extremely straightforward

The LMV2/3 burner management system not only simplifies burner design but also makes the production process, mounting and service work more efficient: The complex linkage required with mechanical air-fuel ratio control is no longer needed and flexibility is increased considerably when using the basic unit.

Depending on the individual unit versions, the LMV2/3 burner management system provides a number of variable program sequences for control of the burner. There is a choice of gas and oil programs, with or without pilot burner, depending on the application and the basic unit version. Even dual-fuel applications with the AGM60 fuel changeover unit are possible.

Extra functions

For a quick burner commissioning, the gas valve proving can be optionally activated during post purging. Operation with only one actuator for pneumatic air-fuel ratio control is possible also. Furthermore, the extensive choice of configurations and parameter settings enables the LMV2/ LMV3 to be matched to almost any type of medium-capacity burner – easily and efficiently.

The LMV3 is approved for continuous operation with ionization probe, enabling it to be used also in connection with steam boilers or in plants for generating process heat.

The LMV2/3 system is designed for mounting on the burner itself or adjacent to the burner components.

Highlights

- Modbus communication
- Analog 4...20 mA input for load controller
- Continuous operation with ionization current supervision
- Simple dual-fuel operation
- Variable actuator running times

Assistant for heavy duties

Application areas

The LMV5 burner management system demonstrates its capabilities and benefits not only in operation but also when it comes to the development and design of new generations of burner: The system has the burner control, electronic air-fuel ratio control and gas valve proving integrated in its basic unit. Optionally, the system can be equipped with a load controller, VSD control and O₂ combustion optimization. The load controller features an electronic safety limit thermostat.

Everlasting operation

Load control is in the form of a PID temperature/pressure controller featuring an algorithm for cold start of hot water or steam boilers, thus ensuring low wear and tear. Furthermore is the load controller


equipped with an electronic safety limit thermostat. Continuous operation poses no problem to the LMV5 when used in connection with universal infrared flame detectors, UV flame detectors or ionization probes. Separate inputs and outputs for oil- or gas-fired operation deliver accurate diagnostics of the connected components and facilitate dual-fuel operation with no need for additional relay changeover.

Economical operation and environmental protection are important issues, especially in connection with technical systems for large building complexes and in industrial process heat generation. Together with the excellent price-performance ratio, the new burner management system now offers the opportunity to switch from mechanical to electronic air-fuel ratio control.

Highlights

- Including gas valve proving
- Optional load controller
- Modbus communication
- All versions suited for continuous operation
- Excellent price-performance ratio
- Combustion optimization via O₂ trim control

Variable retention economizer fires the quick thermal starts.

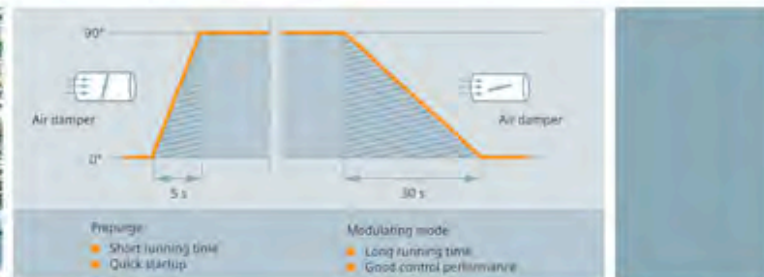



Straightforward service and ease of operation

Extremely straightforward

The LMV5 burner management system not only simplifies burner design but also makes the production process, mounting and service work more efficient: The complex linkage required with mechanical air-fuel ratio control is no longer needed and flexibility in terms of mounting is considerably increased.

The compact basic unit can be fitted directly in or on the burner or, using a powerful data bus, in a control panel. Since mechanical linkage is no longer required, electronic air-fuel ratio control offers a new kind of flexibility when it comes to adjusting the actuators. Also, system integration of functions cuts mounting and commissioning costs.


Clear conditions

The new burner management system talks clear-text – in 17 different languages. The system can be configured and parameterized in accordance with the user-oriented, password-protected access level: Plant operator, service engineer or burner manufacturer. An extra software tool offers even more convenience. It is designed for setting the parameters on the production line and for commissioning the system in the field: It affords excellent process observation, graphic curve presentations based on the drag-and-drop method, plus trend recordings.


Highlights

- Total of 17 languages available
- Optimized configuration by the user
- Straightforward installation and maintenance

LMV5 burner management system, LMV3 system with 0...10V control

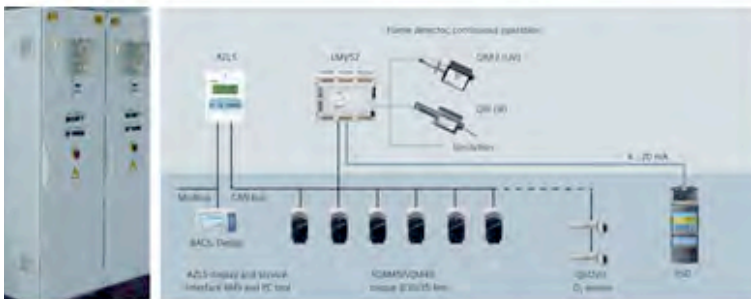

The connection facilities at a glance

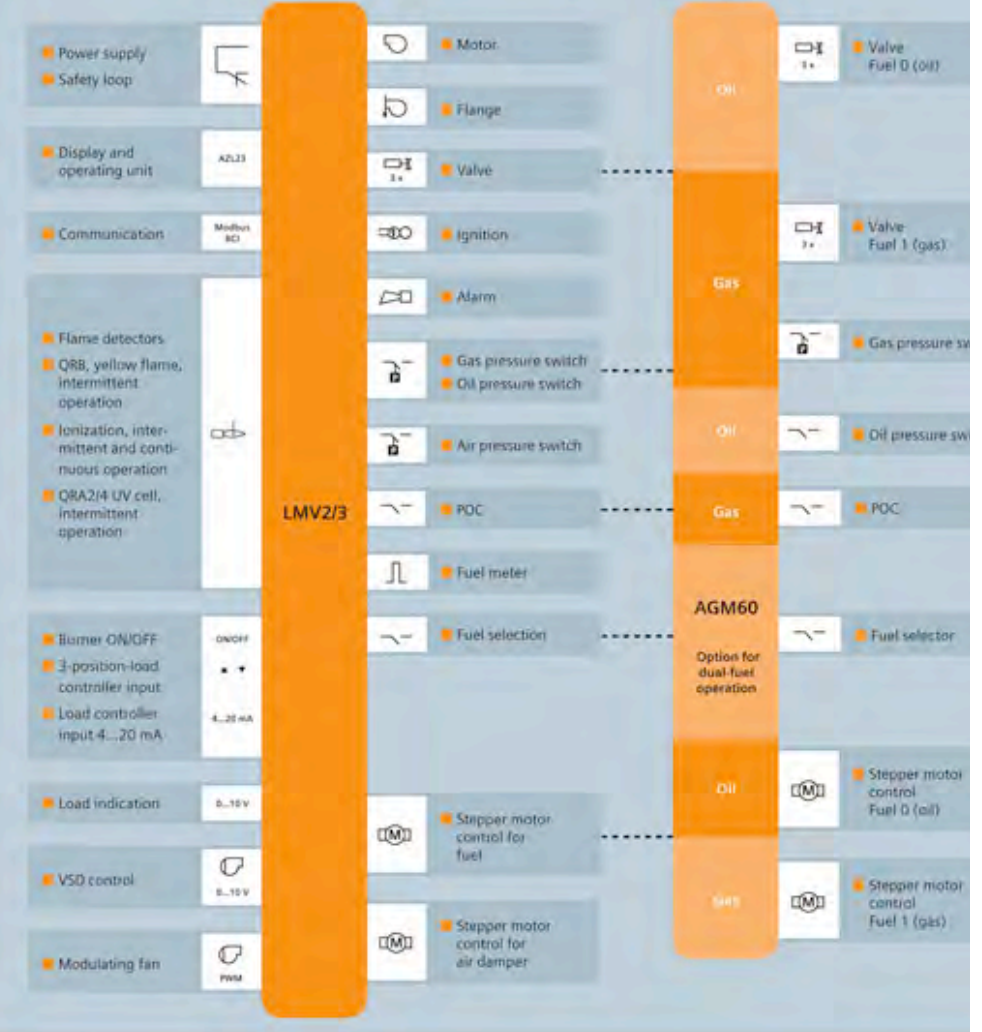


Perfectly equipped

The LMV2/3 is suited for all standard applications ranging from the basic unit for intermittent operation to continuous operation with analogue interfaces.

The inputs and outputs can be used for both oil and gas burners. Actuators with torques up to 3 Nm can be connected to an integrated power pack.

Continuous operation

A connection facility is available for fuel meters. The LMV3 ensures trouble-free continuous operation when used in connection with an ionization probe.

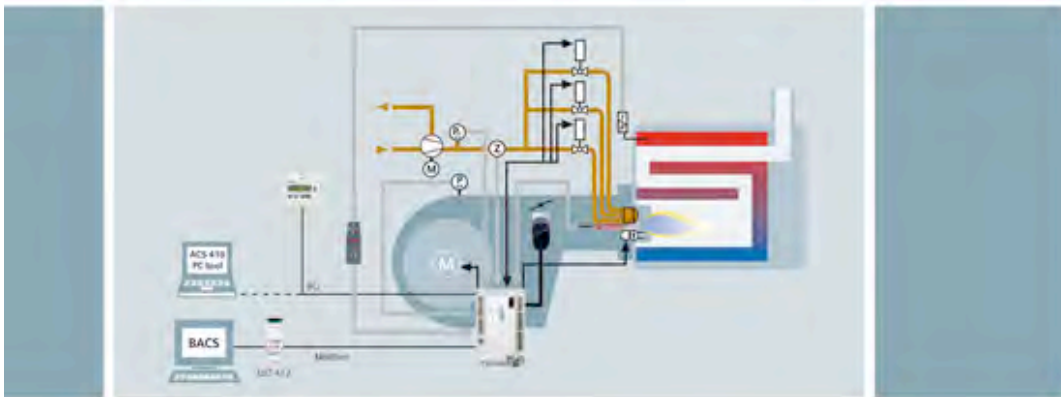

LMV2/3 and its uses

Perfectly matched to the type of burner

The LMV2/3 is the ideal basic unit for any type of burner of medium capacity, be it oil, gas or even dual-fuel burner (modulating or multi-stage) – a solution is always at hand. By selecting the type of fuel train, the required parameters, such as type of flame detector, are automatically preset. This simplifies the configuration and saves commissioning time.

You can choose whether you want to use the LMV2/3 as a proper burner control for pneumatic or electronic air-fuel ratio control.


In the case of LMV26 dual-fuel burner controls for Europe, or LMV36 for North America, any 2 fuel trains can be combined.

The most important are gas modulating and oil multi-stage, with or without gas pilot.

Straightforward service and clear diagnostics

Parameters and air-fuel ratio curves ascertained in the customer's laboratory can be stored with the PC software tool ACS410 to be transferred to new units. This also facilitates straightforward documentation of the delivered burners.


The parameters stored in the LMV2/3 are also stored in the AZL2 display and operating unit. When service work is due, the parameters can be transferred to a new unit. In addition to output via display or ACS410, diagnostics can be made via Modbus and remote maintenance.

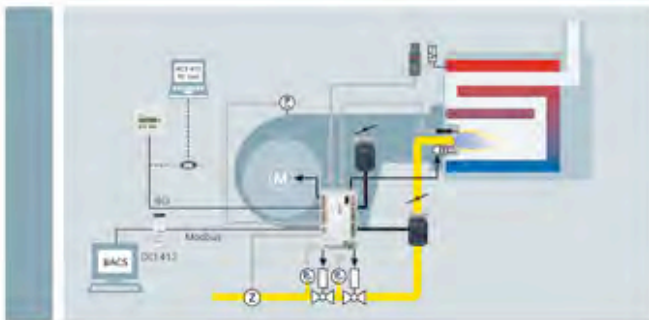

Highlights

- Predefined fuel trains
- Integrated electronic air-fuel ratio control
- Pneumatic air-fuel ratio control with only one actuator
- 3 fuel valves
- Service-friendly thanks to backup/restore facility with AZL2 display and operating unit

The connection facilities at a glance

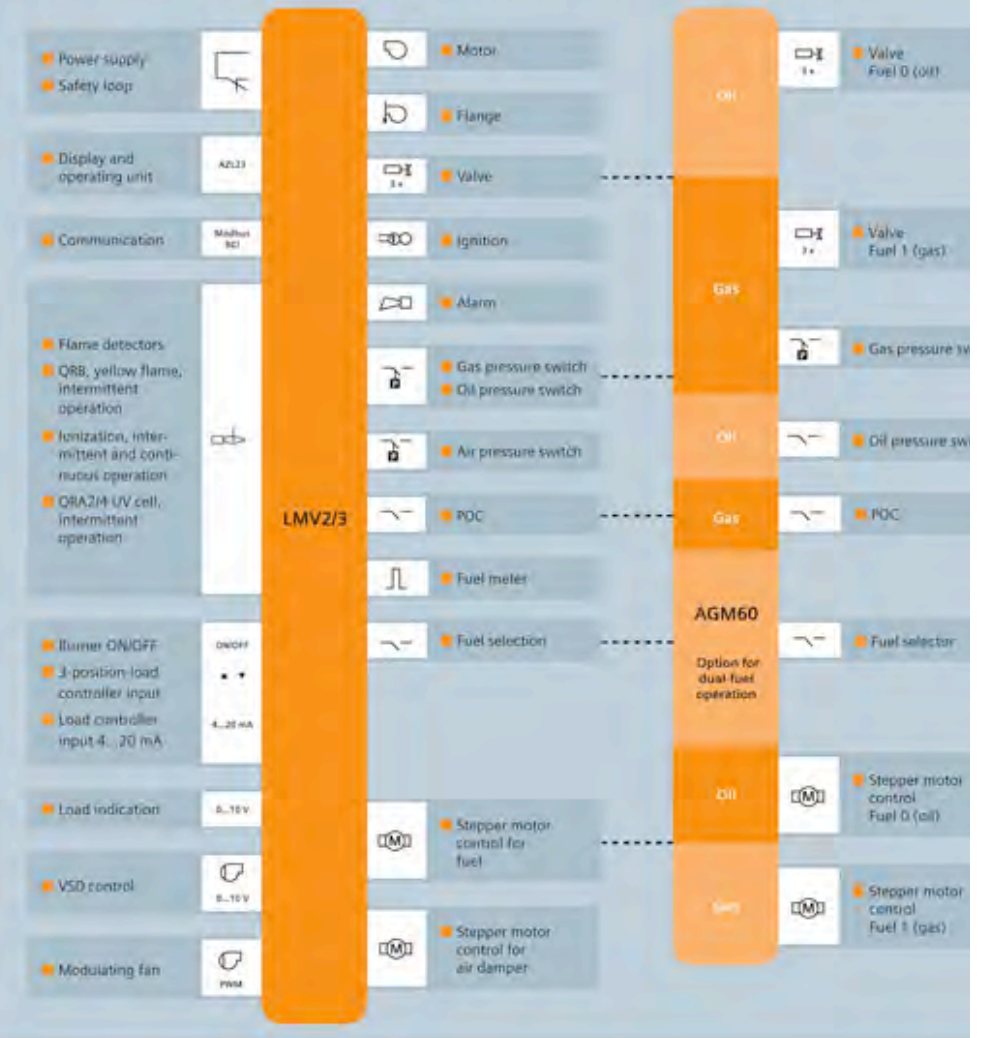



Perfectly equipped

The LMV2/3 is suited for all standard applications ranging from the basic unit for intermittent operation to continuous operation with analogue interfaces.

The inputs and outputs can be used for both oil and gas burners. Actuators with torques up to 3 Nm can be connected via an integrated power pack.

Continuous operation

A connection facility is available for fuel meters. The LMV3 ensures trouble-free continuous operation when used in connection with an ionization probe.

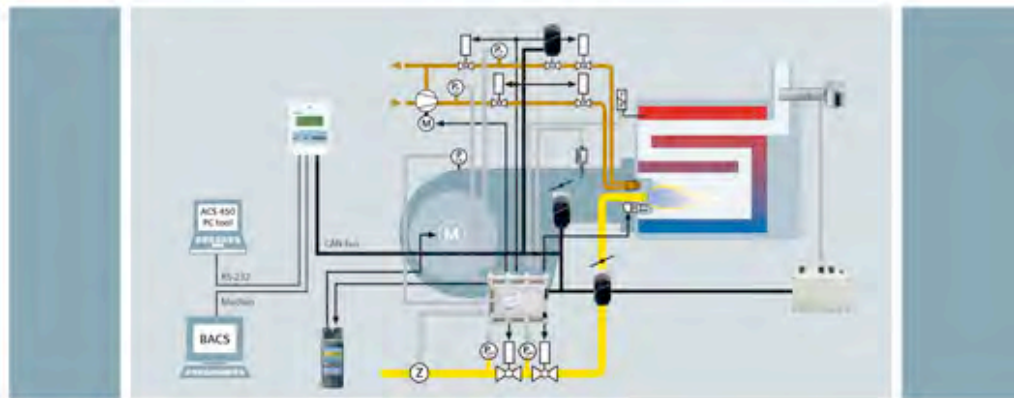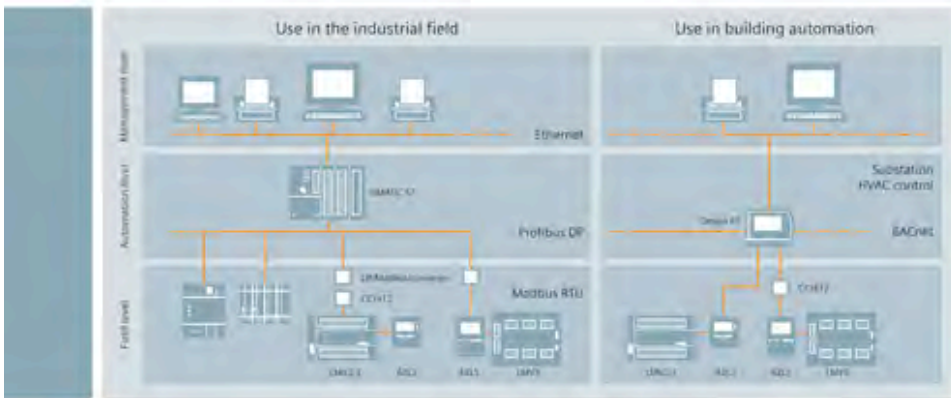

Communication in almost any language

Communication between systems

Communication is becoming more and more important. For this reason – using an open, standardized communication interface – the LMV burner management system can be integrated into the most diverse types of higher level process management systems. The Modbus RTU protocol facilitates efficient and affordably priced integration.

With SIMATIC S7 or Desigo PX, Siemens offers a complete automation concept of modular design. Important actual values and setpoints can be constantly monitored, and information, such as fuel meter or hours run readings and parameter settings, can be displayed and assessed directly on the burner management system. This makes it possible, for instance, that predefined combustion efficiency levels of the burner will be adhered to.

Quick diagnostics

To facilitate quick and targeted diagnostics in the event of a fault, burner service staff can be supplied with all diagnostics data plus the history of the last faults.

Internal communication with safety-related components, such as actuators, the O₂ module and the display and operating unit, is effected via the safety-related CAN system bus. The integrated Modbus interface affords touchpanel operation and remote maintenance of plant. In the event of plant malfunction, this facility can also be used to send an autonomous alarm report to burner service staff.

Highlights

- Open, standardized communication interfaces
- Setting via automation systems
- Diagnostics and status information
- Remote maintenance



LMV5 – ensuring excellent performance

LMV5 load control

An important aspect is integration of the LMV5 burner management system into an existing PLC system. After replacement of the former plant, the LMV5 system can directly provide control of the existing PLC system.

Thanks to the configuration choices (3-position, 4...20 mA, DC 0...10 V, or digital via Modbus), load control of the LMV5 adapts easily to existing plant. The internal load controller or various external load controllers can be connected – or a load controller via process automation.


In the event of a process control failure or communication breakdown, the system automatically reverts to internal load control.


Choice of operating modes

A total of 3 load control operating modes are available: An external load controller can control the LMV5 via the 3-position contact inputs. In that case, the internal control algorithm is deactivated. The connected sensors can be used for control via the internal load controller. Also, the load can be preset via an analogue signal. If process automation is used, the load can be digitally set via Modbus.

Highlights

- Optional connection to existing PLC building automation and co system
- Plant-dependent configuration choices
- Load control for any needs

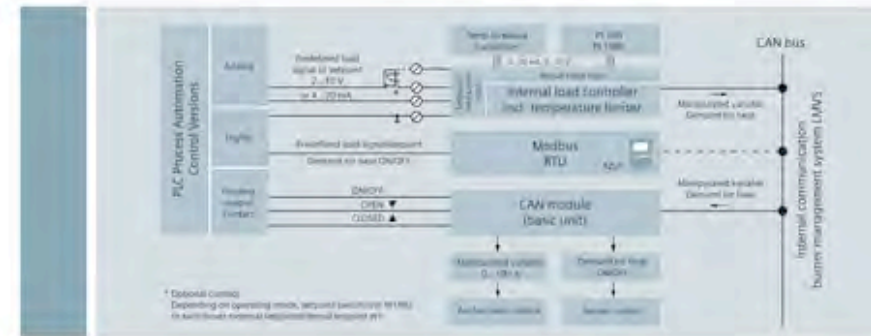

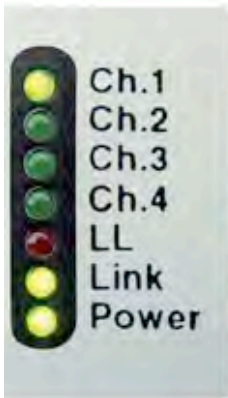

Tools for efficient working

■ Small but efficient assistants

The AZL2 display and operating units are used in connection with the LMV2/LMV3 burner controls, either directly by the burner or in control panels close to the burner.

They afford display, operation and the setting of specific safety and non safety related burner functions. The most important plant data and fault codes can be interrogated and displayed

In connection with the LMV2/LMV3, the ACS410 tool facilitates parameter settings and the display and storage of plant data.

■ Big brother with excellent performance

The LMV5 burner management system is operated and programmed via the AZL5 display and operating unit or the PC tool.

Using the Modbus of the AZL5, the LMV5 system can be integrated into a complex data network (e.g. for process control). This means that functions, such as visualization of plant states, plant control and reporting, can be implemented.

The ACS450 tool required for that purpose is connected directly to the AZL5 and serves for the display and storage of LMV5 data plus parameter settings.

Highlights

- Display of operating states, program phases and fault codes
- Setting of parameters and air-fuel ratio curves
- Modbus interface
- Backup/restore facility
- Reading settings, parameters, operating states and types of fault
- Data logger with trigger function

Sold and Distributed by Forbes and Hunt Boilers

ADELAIDE

599 Port Road, West Croydon SA 5008
Ph: 61 8 8268 8877 Fax: 61 8 8347 1311

MELBOURNE (Hunt Boilers)

11 Helen Kob Drive, Braeside VIC 3195
Ph: 61 3 9580 9377 Fax: 61 3 9580 9411

BRISBANE (Hunt Boilers)

10/37 Mortimer Road, Acacia Ridge Qld 4110
Ph: 61 7 3277 4730 Fax: 61 7 3277 9730

MELBOURNE

49 Lambeck Drive, Tullamarine Vic 3043
Ph: 61 3 8336 1100 Fax: 61 3 8336 1177

SYDNEY (Hunt Boilers)

4/38 Powers Road, Seven Hills NSW 2147
Ph: 61 2 9674 1255 Fax: 61 2 9674 1877

PERTH (Hunt Boilers)

1/14 Baling Street, Cockburn Central WA 6164
Ph: 61 8 9414 8787 Fax: 61 8 9414 8383