



### SWAN model SW-415 Single stage 4 cyl. air cooled



Rev.  
No. CS0308-SW415

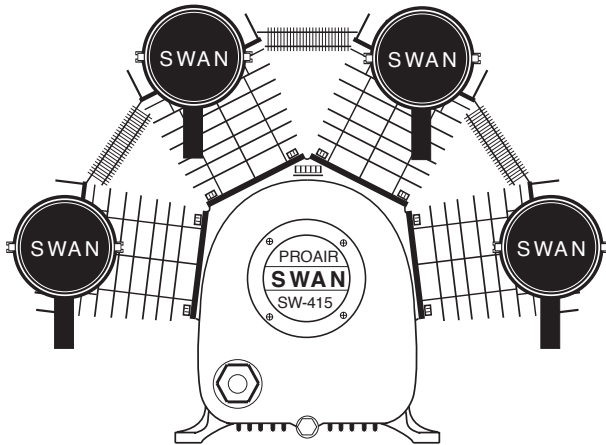

### SW-415 PERFORMANCE

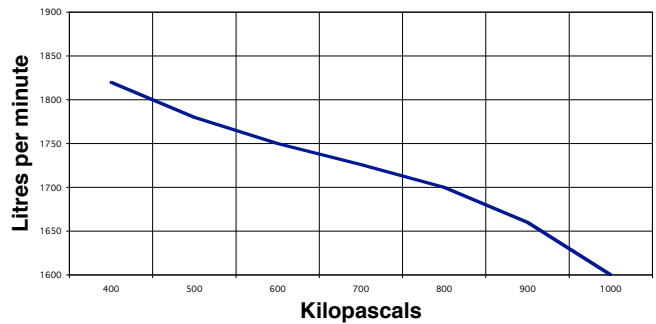

Main Construction Material	Cast Iron	<i>The following are at normal speed with an ambient temperature of 31.1°C &amp; inlet air of 101 kPa g pressure.</i>			
Bore	mm	95	Piston Displacement	L/min	2288
Stroke	mm	85	Free Air Delivery @ 689 kPa	L/min	1726
Minimum Speed	rpm	690	Shaft Input:		
<b>Normal Speed</b>	<b>rpm</b>	<b>950</b>	@ 415 kPa	kW	8.56
Maximum Speed	rpm	1110	@ 551 kPa	kW	9.49
Minimum Working Pressure	kPa	275	@ 689 kPa	kW	10.95
Maximum Working Pressure	kPa	964	@ 964 kPa	kW	12.29
Minimum Ambient Temperature	Celsius	0°	Temperature of Air Discharge:		
Maximum Ambient Temperature	Celsius	45°	@ 415 kPa	Celsius	122°
Air Connection Comp. Fitting (x2)	mm	25	@ 551 kPa	Celsius	136°
Air Cleaners	Dry Paper Type		@ 689 kPa	Celsius	150°
Bore Lubrication	Splash Feed		@ 964 kPa	Celsius	166°
Oil Capacity of Crankcase	Litres	3.001	Maximum Lubricant Consumed		
Type of Drive	V-belt	3B	in 100 hours Operation	millilitre	118.72
Approximate Net Weight	kgs	118	Noise Level at 1 metre	dB(A)	86
Rotation Looking at Flywheel	Anti-clockwise				

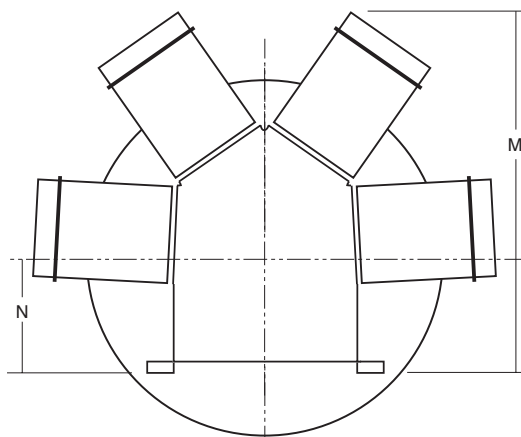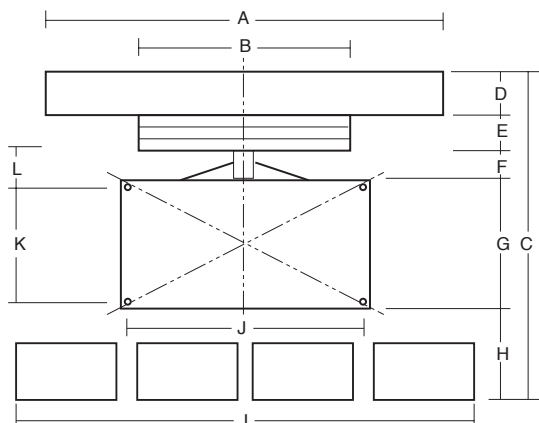

A	560 mm
B	250 mm
C	540 mm
D	60 mm
E	67 mm
F	65 mm
G	215 mm
H	65 mm
I	760 mm
J	275 mm
K	180 mm
L	100 mm
M	540 mm
N	180 mm

Forbes (Aust) Pty Ltd reserves the right to change the specifications of any of its products without prior notice